

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number
WO 2005/083264 A1

(51) International Patent Classification⁷: **F02M 61/20**,
61/12

(21) International Application Number:
PCT/EP2005/050186

(22) International Filing Date: 18 January 2005 (18.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04004593.2 27 February 2004 (27.02.2004) EP

(71) Applicant (for all designated States except US):
SIEMENS VDO AUTOMOTIVE SPA [IT/IT]; S.S.
206 - km 28 - LOC. Luciana, I-56040 Fauglia/Pisa (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FISCHETTI**,
Gianbattista [IT/IT]; Via P. Giordani, I-56000 Pisa (IT).
ZANOBONI, Cristiano [IT/IT]; V. Marie Curie 9f,
I-57016 Rosignano Solvay (IT).

(74) Agent: **BERG, Peter**; Siemens Aktiengesellschaft, Post-
fach 22 16 34, 80506 München (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: FLUID INJECTOR

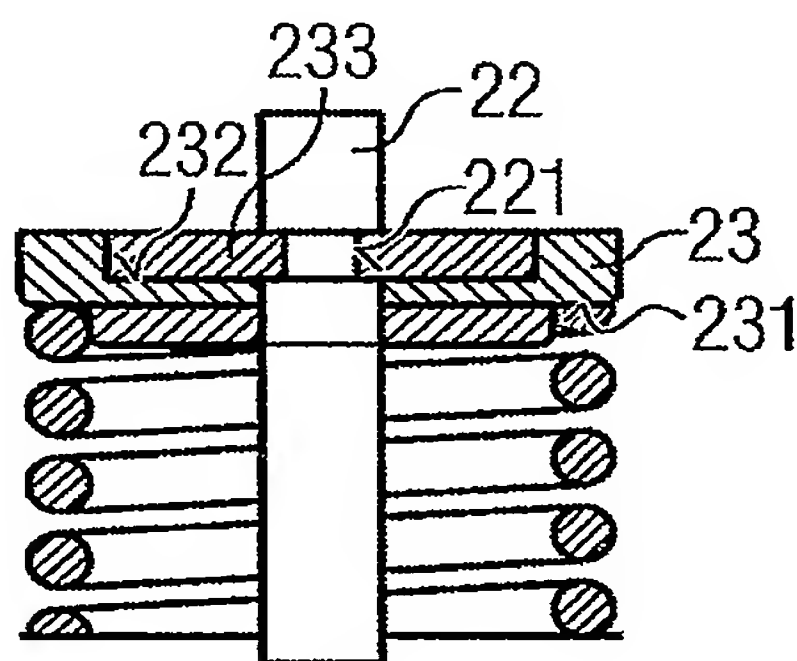

(57) Abstract: A fluid injector has a housing, a valve body and an actuator 5 unit, that is inserted into the housing. The valve body comprises a cartridge with a recess, that takes in a needle (22). A receptance (221) is formed in the needle (22) and fixes a locking element (233) in an axial direction relative to the needle (22). A return spring (24) rests on the spring rest body (23) which is pretensioned in a way that it presses the spring rest body (23) against the locking element (233).

WO 2005/083264 A1